


ELECTRONSISTEM MD TECHNICAL SHEET

Revision 0 of 20 February 2019

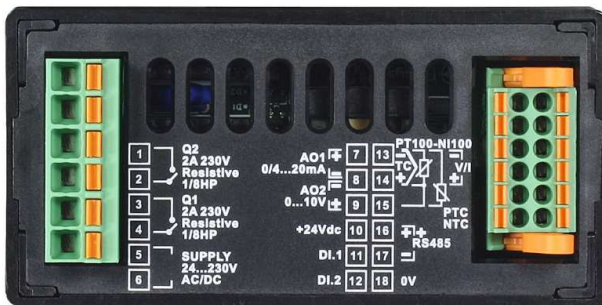

HIGHLIGHTS

- Visualizations
- Alarms
- Signal re-transmission
- Multi voltage range input
- Digital inputs
- Serial communications

APPLICATIONS

The indicator stands out in its market segment for the bright OLED display and the innovative multilingual interface as well for RFID/NFC connectivity. The **analogue input** can be configured by parameter for a wide range of temperature sensors and process signals in mA and Volts. The **monochromatic OLED graphic display** supports graphs showing process trend with programmable sampling times and **bar graphs** with alarm thresholds typically used for level, flow and dosage visualization.

The linearization of input can be customized up to 16 points as required on tanks with irregular profile. Mathematical functions linked to process value are also available, such as Totalizer and Sum. Connectivity is guaranteed by RS485 with Modbus RTU/Slave protocol.

For maximum flexibility of use, it is also possible to choose between horizontal or vertical installation of the same device.

Distinctive feature of the entire PI series is the innovative **multilingual interface**, with text menus allowing intuitive and quick navigation of parameters and display pages. It is possible to choose among five languages and the comprehensive menu considerably reduces the need to consult technical manual for initial set-up.

An additional programming tool is the dedicated App relying on RFID/NFC connectivity and allowing straightforward programming without wirings by Android devices *(option)

ELECTRONSYSTEM MD TECHNICAL SHEET

Revision 0 of 20 February 2019

| Rev./Mod | Data | Rev./Mod | Data | Rev./Mod | Data | Rev./Mod | Data | Rev./Mod | Data |
|---|------|--|------|--|------|--------------------------|------|-------------------------------|------|
| Descrizione: | | Descrizione: | | Descrizione: | | Descrizione: | | Descrizione: | |
| | | | | | | | | | |
| <p style="font-size: small;">We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. We reserve also the rights to modify the drawing without notice. Ci riserviamo tutti i diritti connessi con il presente documento e con l'oggetto o la materia ivi rappresentati con divieto di riprodurlo, utilizzarlo o renderlo accessibile a terzi in assenza di previa autorizzazione. Ci riserviamo anche i diritti di modificare il disegno senza preavviso.</p> | | | | | | | | | |
| Prep. Dis. G. FORLANI App. P. GUZZETTI | | Resp. Dept. Technical Dept. Uff. Resp. | | Title Panel Indicator Appointus Appretechico | | Doc. No. 43931173 | | Scale 1:1 1st. Fog. | |
| NOTE : | | | | | | | | | |
| <h2>ELECTRONSYSTEM MD S.R.L.</h2> | | | | | | | | | |

All specs are subject to change without notice

ELECTRONSYSTEM MD TECHNICAL SHEET

Revision 0 of 20 February 2019

| Rev./Mod Descrizione: | Data | Rev./Mod Descrizione: | Data | Rev./Mod Descrizione: | Data | Rev./Mod Descrizione: | Data | Rev./Mod Descrizione: | Data | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|---------------------------------|-----------------|--------------------------|-----------------|--------------------------|------|--------------------------|------|--------|--------------------------------------|---------------------------------|---|-------------|-----------------|---------|-----------------------------|----------------------|--|---------------|-----------------------|--------------|-----------------|-----------|--|----------------------|--|--------|--|--|--|--|--|--|--|
| <h3>Main features</h3> <table border="1"> <tr> <td>Box</td> <td>96x48 (front panel) x 48 mm (1,80in)</td> </tr> <tr> <td>Power supply</td> <td>24...230VAC/DC ±10% 50/60 Hz (galvanic isolation 2500V)</td> </tr> <tr> <td>Consumption</td> <td>6 VA</td> </tr> <tr> <td>Display</td> <td>Oled (monochromatic yellow)</td> </tr> <tr> <td>Operating conditions</td> <td>Temperature 0-45 °C, humidity 35...95 RH% (non condensing)</td> </tr> <tr> <td>Material</td> <td>Box: Polycarbonate V0</td> </tr> <tr> <td>Weight</td> <td>Approx. 165 g</td> </tr> <tr> <td>Sealing</td> <td>Front panel: IP54 (IP65 with gasket) - Box and Terminal blocks: IP20</td> </tr> <tr> <td>Quick set-up options</td> <td>Software LABSOFTVIEW and/or Memorycard</td> </tr> <tr> <td>Wiring</td> <td>extractable terminal blocks, spring lock</td> </tr> </table> | | | | | | | | | | Box | 96x48 (front panel) x 48 mm (1,80in) | Power supply | 24...230VAC/DC ±10% 50/60 Hz (galvanic isolation 2500V) | Consumption | 6 VA | Display | Oled (monochromatic yellow) | Operating conditions | Temperature 0-45 °C, humidity 35...95 RH% (non condensing) | Material | Box: Polycarbonate V0 | Weight | Approx. 165 g | Sealing | Front panel: IP54 (IP65 with gasket) - Box and Terminal blocks: IP20 | Quick set-up options | Software LABSOFTVIEW and/or Memorycard | Wiring | extractable terminal blocks, spring lock | | | | | | |
| Box | 96x48 (front panel) x 48 mm (1,80in) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power supply | 24...230VAC/DC ±10% 50/60 Hz (galvanic isolation 2500V) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Consumption | 6 VA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Display | Oled (monochromatic yellow) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Operating conditions | Temperature 0-45 °C, humidity 35...95 RH% (non condensing) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Material | Box: Polycarbonate V0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Weight | Approx. 165 g | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Sealing | Front panel: IP54 (IP65 with gasket) - Box and Terminal blocks: IP20 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Quick set-up options | Software LABSOFTVIEW and/or Memorycard | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Wiring | extractable terminal blocks, spring lock | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <h3>Inputs</h3> <p>1 Analogue</p> <p>Res. 16 bit, Selectable for TC (type K, S, R, 1, T, E, N, B (automatic compensation of the cold junction 0..50 °C, ± 0,2% F.S. ± 1 Digit F.S.), thermoresistances PT100, PT500, PT1000, NI100, NI100K, PTC1K, NTC10K (β 3435K), process signals 0..10 V(5000 points), 0/4..20mA(40000 points), 0..60 mV (16000 points), Potentiometer 6 KO, 150 KO (50000 points) Customizable linear input (max 16 steps)</p> <p>2 Digital</p> <p>PNP inputs programmable for Run / Hold / Jare-Zero / Alarms reset/ Peaks reset/ Totalizer reset / Activate-Reset Sum / Parameters-Setpoint Lock</p> <p>Sampling time 4,1 ms (frequency from 4,12 Hz to 242 Hz)</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <h3>Outputs</h3> <p>2 Relays</p> <p>2 Analogue</p> <p>1 Auxiliary</p> <p>Serial communication</p> <p>2A - 250VAC (resistive charge)</p> <p>1 output 0...10V (60000 points) - 1 output 0/4...20mA (60000 points)</p> <p>24 VDC - 30mA for external sensors supply (loop-powered)</p> <p>RS485 Modbus RTU - Slave (1200...115200 Baud) galvanically isolated from Power supply/Inputs/Outputs</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <h3>Software features</h3> <p>Alarms regulation ON - OFF with hysteresis</p> <p>Alarm mode Absolute / Threshold, Band with instantaneous/delayed/retentive/by digital input activation, Sensor failure / Activation by serial line</p> <p>Sum Function Sum different process measurements over time by digital input or by keyboard</p> <p>Totalizer Function Visualisation of instant process value and total value since last reset</p> <p>Trend visualization Trend visualisation with selectable time basis 1 to 3600s</p> <p>Analogue retransmission Process values / Setpoints</p> <p>Digital transmission via RS485 Process values / Setpoint / Parameters</p> <p>Latch-on function Semi-automatic setting of limits/calibration values for analogue input</p> <p>Text menus English/Italian/German/French/Spanish</p> <p>Measure unit visualization Selection of different measuring units</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Switching supply with extended range 24...230 Vac/dc ±15% 50/60Hz - 8 VA (galvanic isolated)</p> <p> Pins 7-8: linear output in mA configurable using parameters as retransmission of process or alarm setpoints</p> <p> For linear signals 0/4...20 mA with two-wire sensor. Comply with polarity: A = Sensor output C = Sensor power supply (+24 Vdc / 35mA)</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <tr> <td>Proj.:</td> <td>C. FORLANI</td> <td colspan="2" rowspan="2">ELECTRONSYSTEM MD S.r.l.</td> <td rowspan="2">Title</td> <td rowspan="2">Panel indicator</td> <td rowspan="2">Scale</td> <td rowspan="2">1:1</td> </tr> <tr> <td>Appr.:</td> <td>P. GUIZZETTI</td> </tr> <tr> <td>Part. number:</td> <td>25.09.2019</td> <td>Resp. Dept.:</td> <td>Technical Dept.</td> <td>Doc. No.:</td> <td>43931173</td> <td>Scale</td> <td>1:1</td> </tr> <tr> <td colspan="2">NOTE :</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> </table> | | | | | | | | | | Proj.: | C. FORLANI | ELECTRONSYSTEM MD S.r.l. | | Title | Panel indicator | Scale | 1:1 | Appr.: | P. GUIZZETTI | Part. number: | 25.09.2019 | Resp. Dept.: | Technical Dept. | Doc. No.: | 43931173 | Scale | 1:1 | NOTE : | | | | | | | |
| Proj.: | C. FORLANI | ELECTRONSYSTEM MD S.r.l. | | Title | Panel indicator | Scale | 1:1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Appr.: | P. GUIZZETTI | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Part. number: | 25.09.2019 | Resp. Dept.: | Technical Dept. | Doc. No.: | 43931173 | Scale | 1:1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NOTE : | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

The reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authorisation is strictly forbidden. The reserve also the rights to modify the drawing without notice. Ci riserviamo tutti i diritti connessi con il presente documento e con quello o la materia di rappresentati con dietro di riproduzione/utilizzo e renderlo accessibile o terzi in assenza di previa autorizzazione. Ci riserviamo anche i diritti di modificare il disegno senza preavviso.

All specs are subject to change without notice

